


SPX-300S

6/10/12/15/17/20/30/40/80 MTR PLUG IN MOBILE .HIGH POWER VERSION.

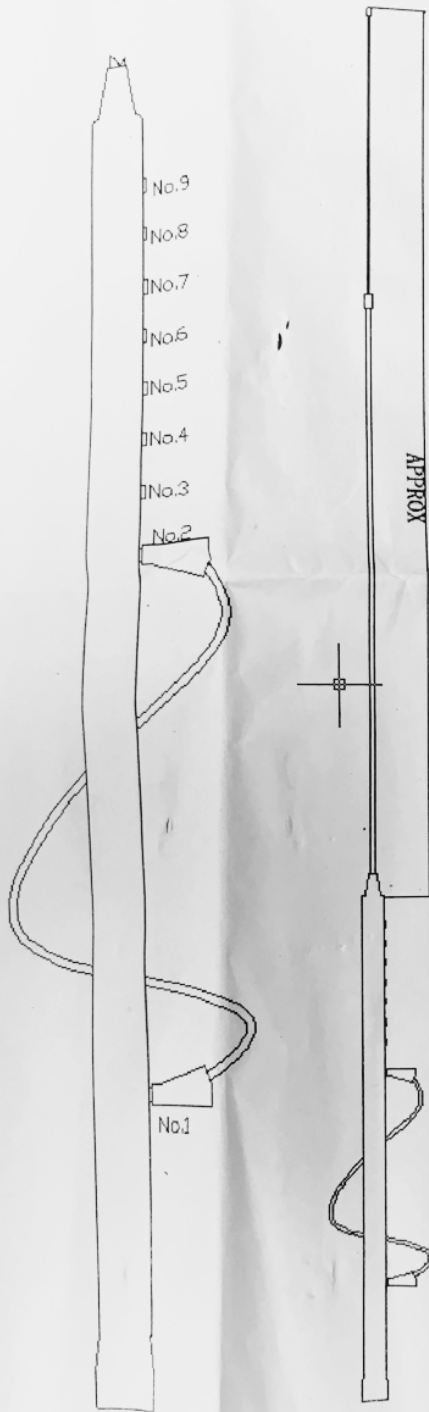

PREQ. IN MHZ		LENGTH OF TELESCOPIC WHIP
3.75	No shorting wire connected	26.3"
7.30	wire from No. 1 to No. 2	24.4"
10.10	wire from No. 1 to No. 3	27.5"
15.00	wire from No. 1 to No. 4	32.3"
18.90	wire from No. 1 to No. 5	34.6"
22.00	wire from No. 1 to No. 6	34.6"
25.30	wire from No. 1 to No. 7	34.6"
29.50	wire from No. 1 to No. 8	26.8"
50.00	wire from No. 1 to No. 9	25.6"

Please note these measurements are Approx starting point, they will vary a little with different positions on vehicle.
 MAX POWER 200 WATTS S.S.B.
 Extension tubes to convert to centre loaded also available.